

PREMIUM OPTION

UPSG3014ST 30-INCH GAS SLIDE-IN RANGE

SIGNATURE
KITCHEN SUITE



PROHEAT™ CONVECTION

Takes the heating element from the bottom of the appliance and puts it in the back wall. Then, to ensure you have even cooking even with a completely full oven, we added a professional circulating fan to distribute the heat evenly.

RAPIDHEAT™ BURNERS

Our burners deliver 18,500 BTUs of power, allowing you to rapidly reach and maintain high temperatures, saving time and effort when mealtime approaches.

EASY SWIVEL HANDLE™

An inventive handle design makes your oven door more convenient to use. The hinge rotates the handle as you pull making it easier to lift and safer to operate, reducing the risk of burns.

WIFI-ENABLED

With ThinQ® technology, you can preheat your oven while you're still at the store. Smart Diagnosis and Clean Alert will make sure everything is working smoothly.

Innovation

WiFi-Enabled for ThinQ® Control with iPhone / Android App	Yes
Remote Operations	Yes

Cooktop Features

Number of Burners / Elements	5
Continuous Grates	3
Dishwasher Safe Grates	Yes
Wok Convertible Grate (On Front Burners)	Yes

Cooktop Performance

Simmer – Max. BTU/h (NG)	
Left Rear	1,100 – 9,000
Right Rear (Simmer)	650 – 5,000
Center Rear (Single Oval)	2,100 – 10,000
Left Front	1,200 – 12,000
Right Front (UltraHeat)	1,400 – 18,500

UPSG3014ST

30-INCH GAS SLIDE-IN RANGE

SIGNATURE
KITCHEN SUITE

Oven Features & Performance

Oven Type	Convection Oven
Oven Capacity (cu. ft.)	6.3
Special Cooking Modes Bake, Convection Bake, Roast, Convection Roast, Broil, Warm, Proof, Pizza	
Convection System	ProHeat™
Convection Element BTU/h	19,000
Convection Conversion	Yes
Broil Element BTU/h	15,000
Oven Racks	3 Gliding
Oven Meat Probe	Yes
Self Cleaning	Yes
Variable Time Self Cleaning (2-3-4 hrs.)	Yes
Speed Cleaning (10 min.)	Yes
Automatic Shut-Off (After 12 hrs.)	Yes
Interior Oven Light (Auto & Manual)	Yes
Easy Swivel Handle™	Yes
GlideShut™ Door	Yes

Controls

Touch Oven Controls w/LCD Display	Yes
Knob Cooktop Controls	Yes
Touch Drawer Controls w/LCD Display	Yes
Electronic Clock & Timer	Yes
Control Lock (Oven Functions Only)	Yes
Delay Start Time	Yes
Audible Preheat Signal	Yes
Cooking Complete Reminder	Yes
Temperature Display (F or C)	Yes
Language Options	English, Spanish, French

Cooktop / General Features

Sealed Gas Burners (Brass)	Yes
Surface Material	Stainless Steel
Stainless Steel Side Panels	Yes
Door Lock	Yes

Drawer Features

Type	Warming
GlideShut™ Drawer	Yes
Heating Element	500 W
Capacity	0.8 cu. ft.

Technical Specs

Energy Source	Gas
Alternative Energy Source	LP Gas
LP Conversion Kit Included	Yes
Amp Rating at 120V	8.3A
Required Power Supply	120VAC, 60Hz

Dimensions and Weight

Overall Width (inches)	29 7/8
Overall Height Including Grates (inches)	37 5/16
Overall Depth Including Door (inches)	25 3/4
Overall Depth Including Handle (inches)	29 5/16
Net Weight (approx.)	176.3 lbs.
Shipping Weight (approx.)	209.4 lbs.

Accessories

Included Accessories 3 Gliding Racks, Meat Probe, 1 Griddle, Rear Filler Kit, Cleaning Pad, Spray Bottle	
Optional Accessories	
Broiler Pan	MJS61850003
Grid	MJS61849903

Warranty Summary*

Limited Warranty, Parts & Labor	3 Years
---------------------------------	---------



*These warranties give you specific legal rights and you may have other rights that vary from state to state. For complete warranty details, refer to your Use & Care manual.

UPSG3014ST
30-INCH GAS SLIDE-IN RANGE

SIGNATURE
KITCHEN SUITE

DIMENSIONS AND CLEARANCES


GAS PIPE AND ELECTRICAL OUTLET LOCATIONS

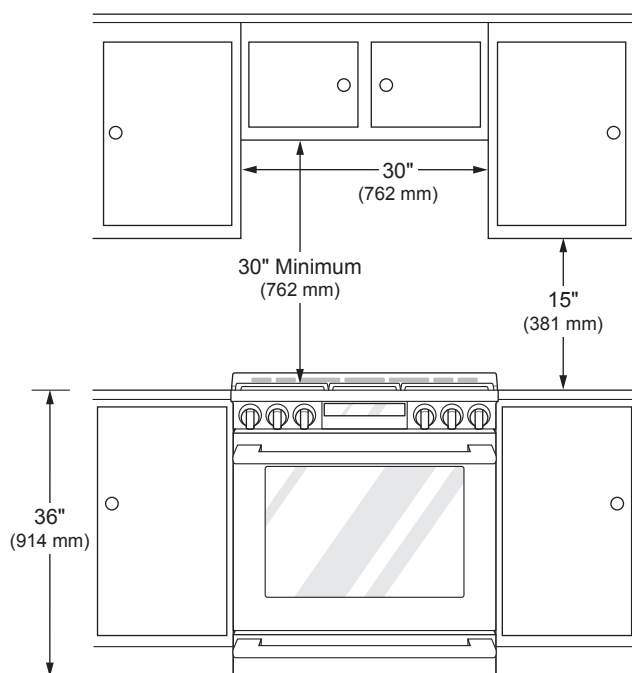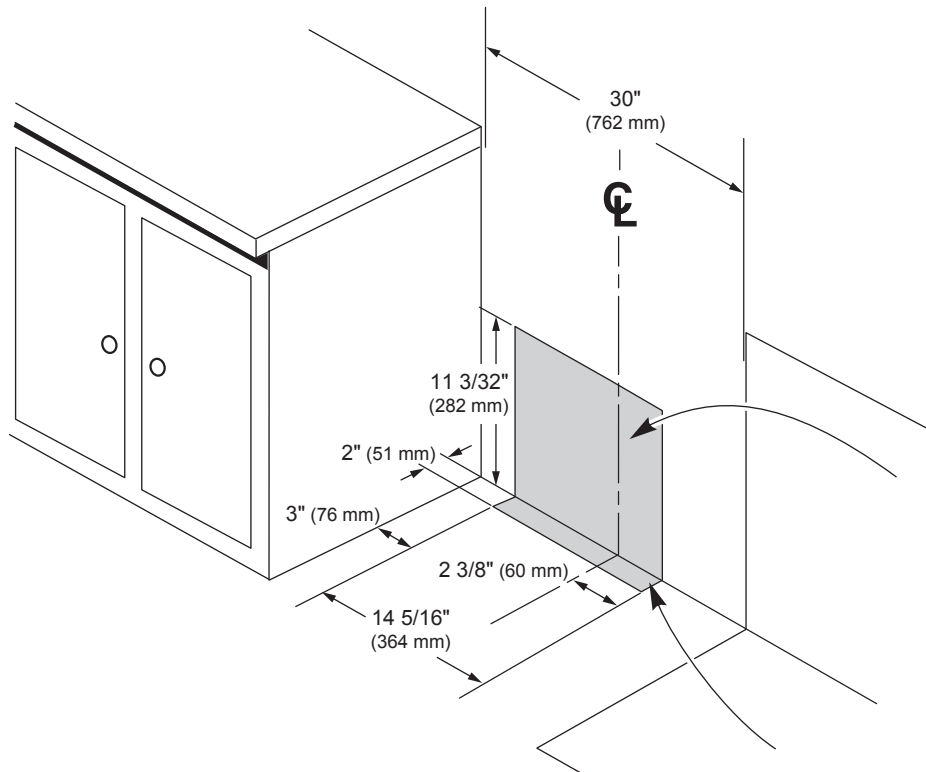

UPSG3014ST
30-INCH GAS SLIDE-IN RANGE

SIGNATURE
KITCHEN SUITE

OVERALL PRODUCT DIMENSIONS

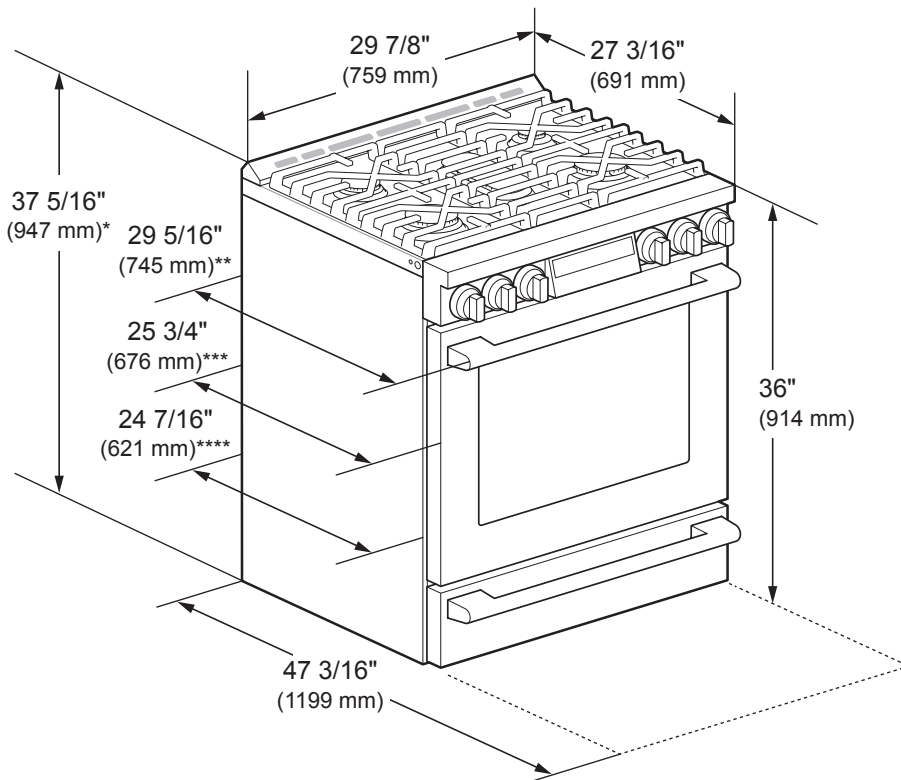

*Including Grates (Unit can be raised an additional 1" (25 mm))

**Including Handle

***Including Door

****Max. Cabinet Depth (Does Not Include Door)

SKSDW2401S

POWERSTEAM® STAINLESS STEEL DISHWASHER

SIGNATURE

KITCHEN SUITE



POWERSTEAM® TECHNOLOGY

PowerSteam Technology offers maximum steam coverage for 60% less water spots,* resulting in the most sparkling clean dishes.

LODECIBEL™ QUIET OPERATION (40 dBA)

Signature Kitchen Suite dishwashers are among the quietest on the market, so you can enjoy a powerful clean—without disrupting your day.

LED INTERIOR LIGHTING

The LED interior lighting makes the loading and unloading process easier, while a beam of light shines information on the floor to let you know the status of the cycle.

EASY LOADING AND MAXIMUM FLEXIBILITY

The newly-enhanced EasyRack™ Plus system provides outstanding flexibility and convenience, adjusting to just about any load of dishes to help ensure optimal cleaning performance. The height adjustable 3rd rack provides more space and flexibility to fit virtually everything from flatware to espresso cups.

WI-FI ENABLED FOR SMART CONTROL

Monitor cycle status, get notifications when a cycle is completed, and download and use specialized dishwasher cycles—all from a mobile device using the Signature Kitchen Suite™ app.

Innovation

Wi-Fi Enabled for ThinQ® Control with iPhone / Android App	Yes
Remote Monitoring	Yes

Performance

PowerSteam® Technology	Yes
QuadWash™ System	Yes
Inverter Direct Drive™ Technology	Yes
LoDecibel™ Quiet Operation	40 dBA
Number of Spray Arms	3 (Top, Upper, Lower)
SenseClean™ Wash System	Yes
Vario Wash	Yes
Hidden Water Heater	Yes
3-Stage Filtration System	Yes
Hybrid Condensing Drying System	Yes

Features

Number of Wash Cycles	10 (Auto, Heavy, Delicate, Refresh, Normal, Turbo, Download Cycle, Machine Clean, Rinse, Express)
Number of Options	9 (Dual Zone, Half Load, Energy Saver, Steam, High Temp, Extra Dry, Delay Start, Control Lock, Night Dry)
End of Cycle Indicator	
Beeper + END Indication on Display	
Detergent and Rinse-Aid Dispenser	Yes
Tub Light	Yes

*Percent in water spot reduction compared to comparable non-steam dishwasher on delicate wash cycle. Results may vary by model. Results based on testing with non-steam dishwasher LDF7774ST as of Feb 2018.

© 2020 Signature Kitchen Suite. All rights reserved. Design, features and specifications are subject to change without notice. Specifications are for planning purposes only. Consult the product's installation instructions for final dimensional data and other details prior to making cutouts or custom panels. Consult with a heating and ventilation engineer for your specific ventilation requirements. Non-metric weights and measurements are approximate. Smart features require Internet access.

1-855-790-6655 | www.signaturekitchensuite.com

SKSDW2401S

POWERTEAM® STAINLESS STEEL DISHWASHER

SIGNATURE
KITCHEN SUITE

Style and Design

Electronic Controls	Top Control
Signalight™ Cycle Indicator Lights	3
Time Remaining Indicator	LED
Tub Material	NeveRust™ Stainless Steel
Balanced Door	Yes

Capacity

Total Place Settings	15
EasyRack™ Plus System	Yes
Height-Adjustable 3rd Rack	Yes
Height Adjustable Upper Rack	Yes
Cutlery Baskets	Yes
Cup Rack	Yes
Stemware Holder	Yes
Fold Down Tines	Full Fold Upper / Lower
BPA-Free Nylon Coated Racks / Tines	Yes
Rack Handle	Upper / Lower
Glide Rail	Yes
Wheel Bearing	Yes

Technical Specs

ENERGY STAR® Qualified	Yes
Energy Use (kWh/Year)	269 kWh/Year
Water Use (Gallons/Cycle)	2.9
Required Power Supply	120 V, 60 Hz, 15 Amp
Inlet Water Temperature	120 °F min. - 149 °F max.
Water Pressure	20 – 80 psi

Dimensions and Weight

Overall Width (Inches)	23 3/4"
Overall Height (Inches)	33 5/8"-36"
Overall Depth (Inches)	24 5/8"
Depth with Door Closed with Handle	26 5/8"
Depth with Door Open	50 1/2"
Net Weight (approx.)	94 lbs
Shipping Weight (approx.)	106 lbs

Warranty Summary*

Limited Warranty, Parts & Labor	3 Years
Limited Warranty on Control Board and Rack Parts, Parts and Labor	5 Years
Limited Warranty on Direct Drive Motor, Parts and Labor	10 Years
Limited Warranty on Stainless Steel Door Liner or Tub, Parts and Labor	Lifetime

*These warranties give you specific legal rights and you may have other rights that vary from state to state. For complete warranty details, refer to your Use & Care manual.

SKSDW2401S


POWERTEAM® STAINLESS STEEL

DISHWASHER


SIGNATURE
KITCHEN SUITE

OVERALL PRODUCT DIMENSIONS


BACK VIEW

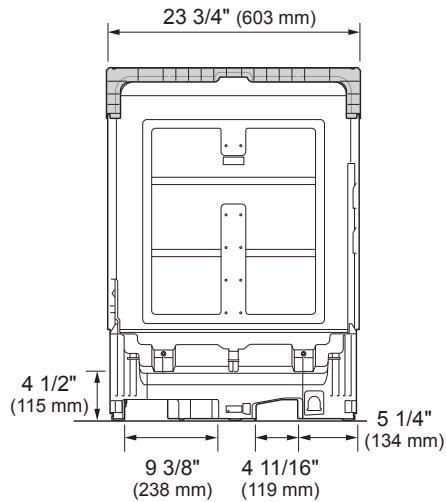

SIDE VIEW

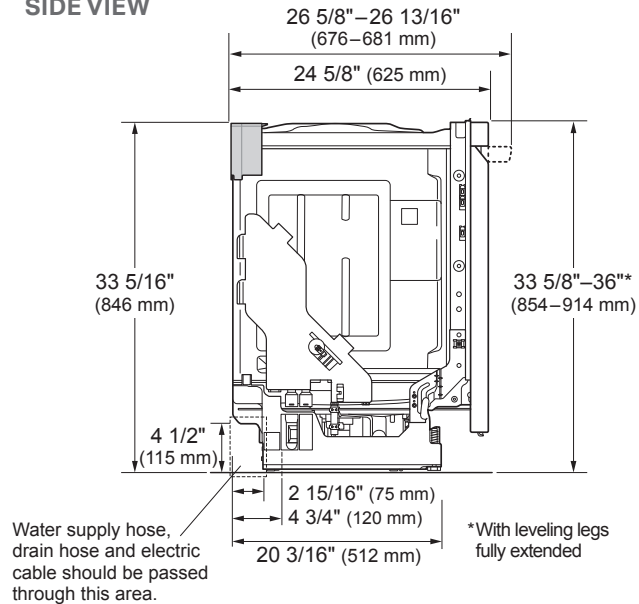

INSTALLATION CLEARANCES

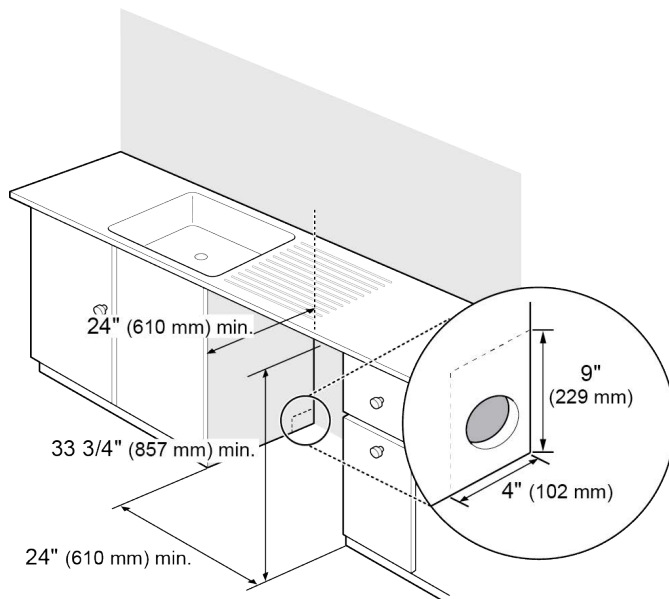

Notes

This dishwasher is designed to fit a standard dishwasher opening. An opening may be needed on both sides to route plumbing and electrical connections. See marked areas above for water and electrical clearances in base of dishwasher.

To ensure proper drainage, install the dishwasher no more than 12 ft. (3.65 m) from the sink.

Electrical connection should be in an accessible location adjacent to and not behind the dishwasher and within 4 ft. (1.2 m) of the dishwasher's side.

SKSFD3613S

36-INCH COUNTER-DEPTH FRENCH DOOR REFRIGERATOR

SIGNATURE
KITCHEN SUITE



DOOR-IN-DOOR™ WITH COLDSAVER™ PANEL

Save time with storage ingeniously hidden inside the refrigerator door.

CRAFT ICE™

Our exclusive slow-melting round ice maker automatically makes batches of three to six ice spheres per day. Give your beverages unique ice for next level entertaining, from craft cocktails & whiskey to soft drinks.

SMART COOLING PLUS® SYSTEM

The Inverter Linear Compressor and Dual Evaporators react quickly to humidity and temperature levels and help keep food fresher, longer.

3-TIER ORGANIZATION FREEZER

Keep food organized and easily accessible so you can find anything fast.

COOLGUARD™

CoolGuard™ metal interior panel adds a premium look.

WI-FI-ENABLED

With ThinQ® technology, you can control your refrigerator from a smartphone, monitor energy usage and get important alerts.

Style

Counter-Depth	Yes
Door-in-Door™	Yes

Innovation

Wi-Fi-Enabled for ThinQ® Control with iPhone / Android App	Yes
Remote Operations	Yes
Linear Compressor	Yes
Craft Ice™	Yes (In Freezer)

Performance

Dual Evaporators	Yes
Modes	Ice Plus, Demo, Icemaker On / Off, Power On / Off, Temp Control, Water Filter Reset, Smart Diagnosis, WiFi, Smart Grid
Water Filter (6 Months)	Yes

Capacity and Storage

Total Capacity (cu. ft.)	23.5 cu. ft.
Refrigerator	
Storage Shelves	4 Adjustable, 1 Fixed
Fresh Filters	Yes
Folding Shelf	Yes
Shelf Construction	Spill Protector™ Tempered Glass
Crisper Bins	2-Humidity Crispers, 1 Condiment Box
Glide N' Serve™ Drawer with Digital Controls	Yes
Freezer	
Drawer Type	Pull-out Drawer
3-Tier Organization	Yes
DuraBase™ Solid Drawer Base	Yes
Ice Bin	Yes

© 2020 Signature Kitchen Suite. All rights reserved. Design, features and specifications are subject to change without notice. Specifications are for planning purposes only. Consult the product's installation instructions for final dimensional data and other details prior to making cutouts or custom panels. Consult with a heating and ventilation engineer for your specific ventilation requirements. Non-metric weights and measurements are approximate. Smart features require Internet access.

1-855-790-6655 | www.signaturekitchensuite.com

SKSFD3613S
36-INCH COUNTER-DEPTH
FRENCH DOOR REFRIGERATOR

General Features

SmoothTouch™ Stainless Steel Controls w/White LED Display	Yes (External)
Water Filter Indicator	Yes
Ice Production (24 Hrs.)	4.5 lbs (4.9 lbs with IcePlus™)
Ice On / Off	Yes
CoolGuard™ Metal Interior Panel	Yes
Premium LED Interior Lighting	Yes
Maximum Sound Level	42 dBA
ENERGY STAR® Certified	Yes
Energy Consumption	717 kWh/Year
Dual Ice Makers with Craft Ice™	Yes
External Ice & Water Dispenser	Yes
Smart Grid Ready	Yes
Ice System	Slim Spaceplus™
Temperature Sensors	10
Door Alarm	Yes
Cooling System	Multi-Air-Flow Technology

Technical Specs

Required Power Supply	115 V, 60 Hz, 15 Amp
Plug Type	3-Prong
Power Cord Length	110"

Dimensions and Weight

Overall Width (inches)	35 3/4
Overall Height (inches)	70 1/4
Overall Depth with Handles (inches)	30 3/4
Overall Depth without Handles (inches)	28 1/4
Overall Depth without Door (inches)	24
Net Weight (approx.)	317 lbs.
Shipping Weight (approx.)	341 lbs.

Optional Accessories

Replacement Water Filter	LT1000P-S
--------------------------	-----------

Warranty Summary*

Limited Warranty, Parts & Labor	3 Years
Limited Warranty on Sealed System, Parts and Labor	3 Years
Limited Warranty on Sealed System, Parts Only	7 Years

*These warranties give you specific legal rights and you may have other rights that vary from state to state. For complete warranty details, refer to your Use & Care manual.


SKSFD3613S

36-INCH COUNTER-DEPTH FRENCH DOOR REFRIGERATOR

SIGNATURE
KITCHEN SUITE

OVERALL PRODUCT DIMENSIONS

FRONT VIEW

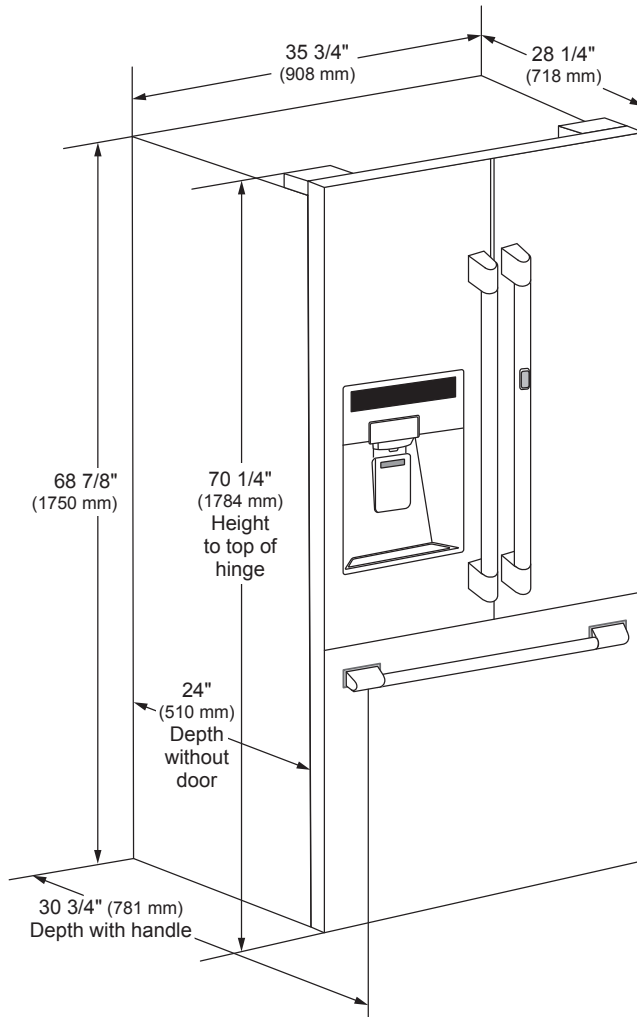

Notes

Check the dimension of the cutout to install the product against the dimension stated in the installation manual. The dimensions are the recommended dimensions to install the product. (If the cutout dimension is smaller than the recommended dimension, the product cannot be installed.)

Clearances


The installation must allow for clearances to adjacent walls or cabinets. This refrigerator is equipped with a 2-position door stop. The factory-set 110° door swing can be adjusted to 90° if clearance to adjacent cabinets or walls is restricted.

A minimum of 2" (50 mm) clearance to the back wall is required.

A minimum of 2" (50 mm) clearance above the refrigerator is required.

A minimum of 24" (610 mm) in front of the refrigerator is required.

TOP VIEW

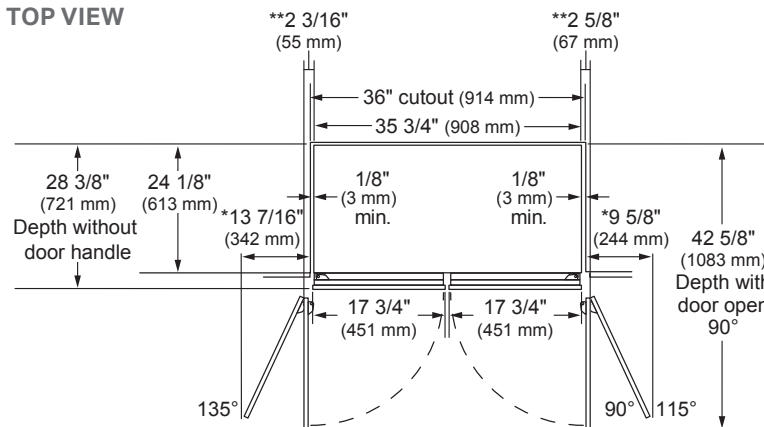

*Add 2 1/2" (63 mm) for door handle

**Clearance required to open door 90°

SKSMD2401S

MICROWAVE OVEN DRAWER

SIGNATURE
KITCHEN SUITE



1.2 CU. FT. OVEN CAPACITY

1.2 cu. ft. capacity is designed to provide plenty of room to heat large items like casserole dishes and dinner platters.

EASY TOUCH AUTOMATIC DRAWER

The Easy Touch Automatic Drawer system eases open with a gentle pull or the touch of a button. Give the drawer a small nudge and it smoothly shuts for you. The even, gliding action and solid construction prevents liquids from spilling during opening and closing.

SMOOTHTOUCH™ GLASS CONTROLS

Intuitive SmoothTouch™ Glass Controls not only look sleek but make operating the microwave drawer easy with just a touch. The seamless controls are also easy to wipe clean.

INSTALLATION FLEXIBILITY

Flexible installation options include below an island or peninsula and in standard cabinetry. A heat deflector kit is included for flush or true flush installation for an integrated, streamlined look.

Features

Capacity	1.2 cu. ft.
Power Output	900 W
Sensor Cooking	Yes
Drawer Opening	Easy Touch Automatic
Lighting	Incandescent

Cooking Menu

Display Type	SmoothTouch™ Glass Touch
Power Levels	11
Sensor Touch Cooking / Reheat Options	12 (Baked Potatoes, Sweet Potatoes, Fish / Seafood, Brown Rice, White Rice, Quick Fresh Vegetables, Longer Fresh Vegetables, Steamer Bag, Frozen Vegetables, Ground Meat, Frozen, Beverage Reheat)
Defrost Options	6 (Ground Meat, Steaks/Chops, Boneless Poultry, Bone-in Poultry, Roast, Casserole/ Soup)
Minute Plus™	Yes
Stop/Clear, Start/Enter	Yes
Completion Beeper	Yes
Energy Saving Mode	Yes (Dims Display After 3 Minutes of Inactivity)
Kitchen Timer/Clock	Yes
Child Safety Lock	Yes

© 2020 Signature Kitchen Suite. All rights reserved. Design, features and specifications are subject to change without notice. Specifications are for planning purposes only. Consult the product's installation instructions for final dimensional data and other details prior to making cutouts or custom panels. Consult with a heating and ventilation engineer for your specific ventilation requirements. Non-metric weights and measurements are approximate. Smart features require Internet access.

1-855-790-6655 | www.signaturekitchensuite.com

SKSMD2401S
MICROWAVE OVEN DRAWER

Installation Features

Deflector Vent Kit Included (Required for Flush and True Flush Installation)	Yes
--	-----

Technical Specs

Required Power Supply	120V, 60Hz / 15 Amp
Plug Type	3-Prong
Power Cord Length (inches)	48


Dimensions and Weight

Overall Exterior Width (inches)	23 7/8
Overall Exterior Height (inches)	15 15/16
Overall Exterior Depth (inches)	23 1/64
Required Cutout Width (inches)	22 1/8
Required Cutout Height (inches)	15 9/16
Required Cutout Depth (inches)	23 1/2
Interior Width (inches)	17 5/16
Interior Height (inches)	7 1/8
Interior Depth (inches)	16 9/16
Net Weight (approx.)	74 lbs
Shipping Weight (approx.)	88 lbs


Warranty Summary*

Limited Warranty, Parts & Labor (In Home Service)	3 Years
Limited Warranty on Magnetron (In Home Service)	10 Years

OVERALL PRODUCT DIMENSIONS

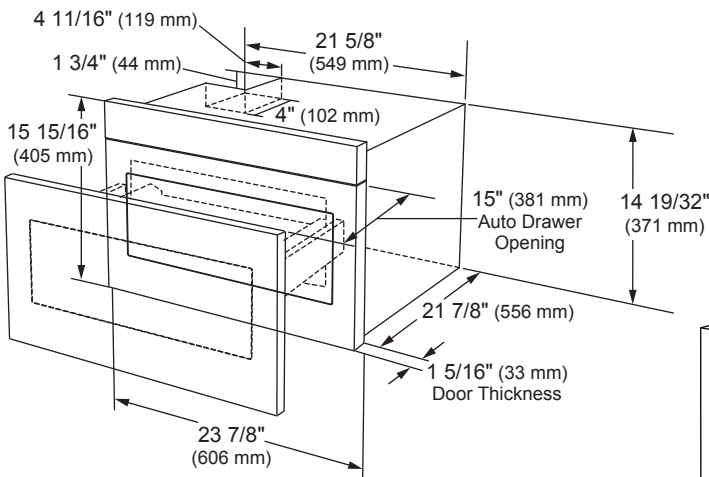

MOUNTING SCREW LOCATIONS

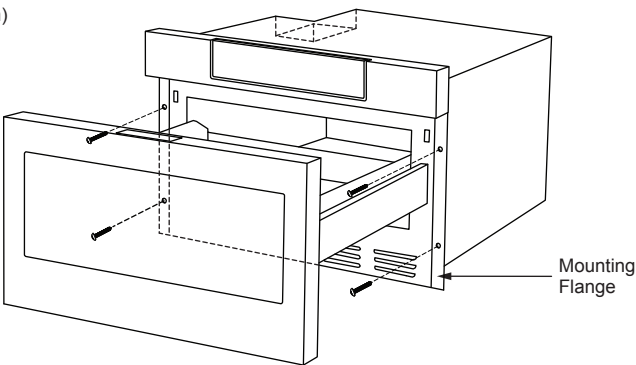


*These warranties give you specific legal rights and you may have other rights that vary from state to state. For complete warranty details, refer to your Use & Care manual.

SKSMD2401S

MICROWAVE OVEN DRAWER

SIGNATURE
KITCHEN SUITE

STANDARD (PROUD) INSTALLATION

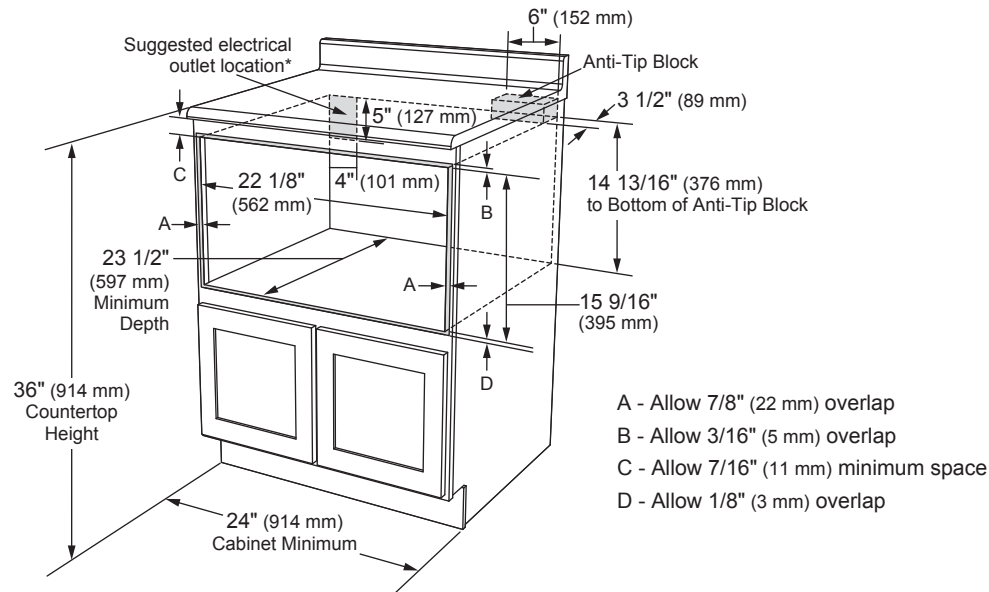

*Can also be installed using an electrical outlet in an adjacent cabinet within the area where the provided electrical cord can reach. Power cord access hole in cabinet should be a minimum 1 1/2" (38 mm) diameter hole and deburred of all sharp edges.

Notes

The floor of the opening should be constructed of plywood strong enough to support the weight of the oven (about 100 pounds).

Electrical

A 120V, 60Hz grounded power receptacle should be installed at the back of the cabinet opening.

Warning

Be sure that the clearance of the floor between the wall oven and the microwave drawer is a minimum of 2-inches.


SKSMD2401S

MICROWAVE OVEN DRAWER

SIGNATURE
KITCHEN SUITE

A growing trend in the installation of kitchen appliances is mounting flush. This allows the consumer to present their appliances with a clean, flush with the cabinet face appearance. In this installation type, there are two ways to accomplish this look: 1/4" front extended and true flush.

FLUSH (1/4" FRONT EXTENDED) INSTALLATION – REQUIRES DEFLECTOR VENT (KIT INCLUDED)

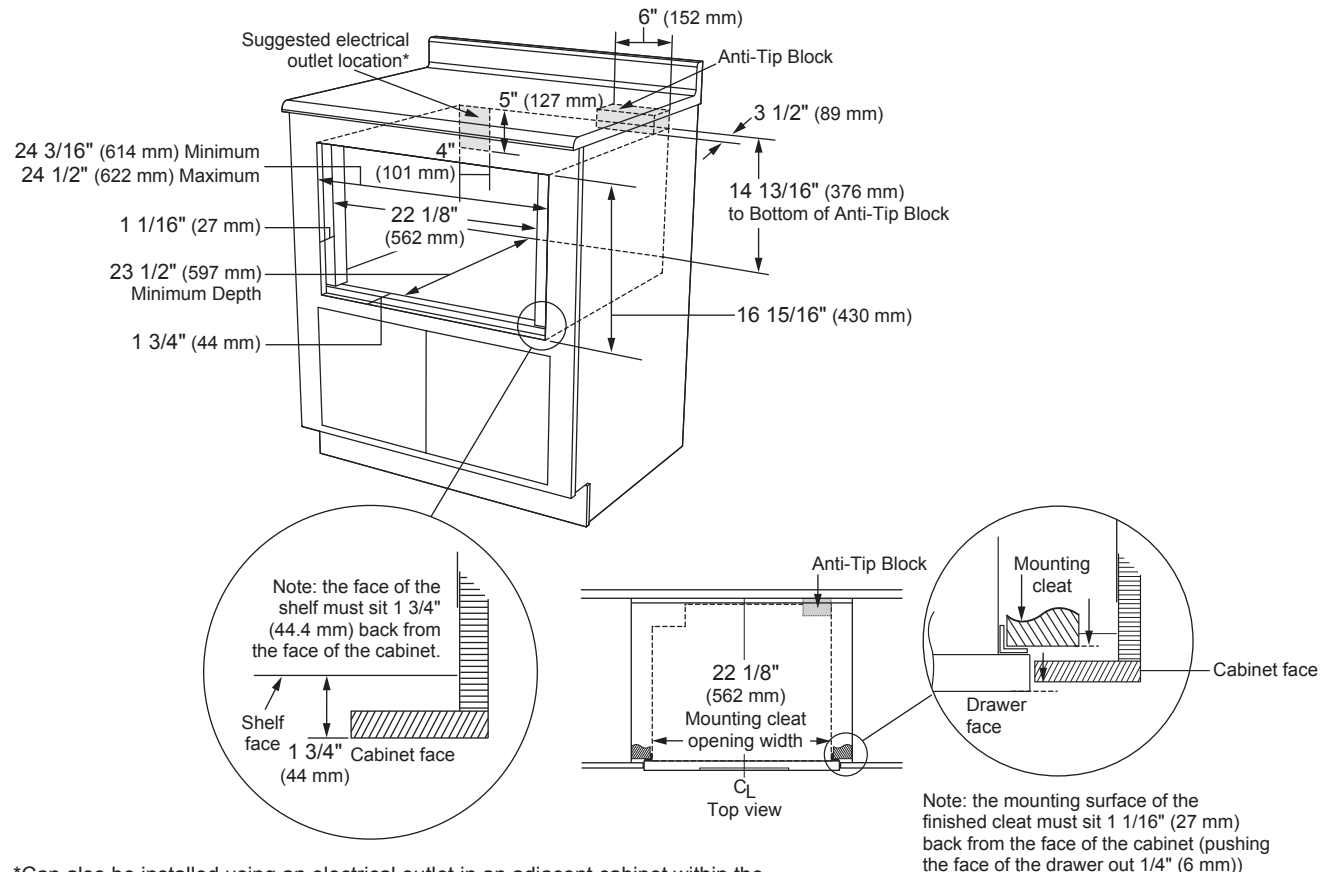

*Can also be installed using an electrical outlet in an adjacent cabinet within the area where the provided electrical cord can reach. Power cord access hole in cabinet should be a minimum 1 1/2" (38 mm) diameter hole and deburred of all sharp edges.


Notes

In the flush 1/4" front extended application, the appliance can be mounted slightly "proud" of the cabinet cutout, which will create a flush appearance. Having the 1/4" extension also allows to hide the cabinet cutout edges.

SKSMD2401S MICROWAVE OVEN DRAWER

SIGNATURE
KITCHEN SUITE

TRUE FLUSH INSTALLATION – REQUIRES DEFLECTOR VENT (KIT INCLUDED)

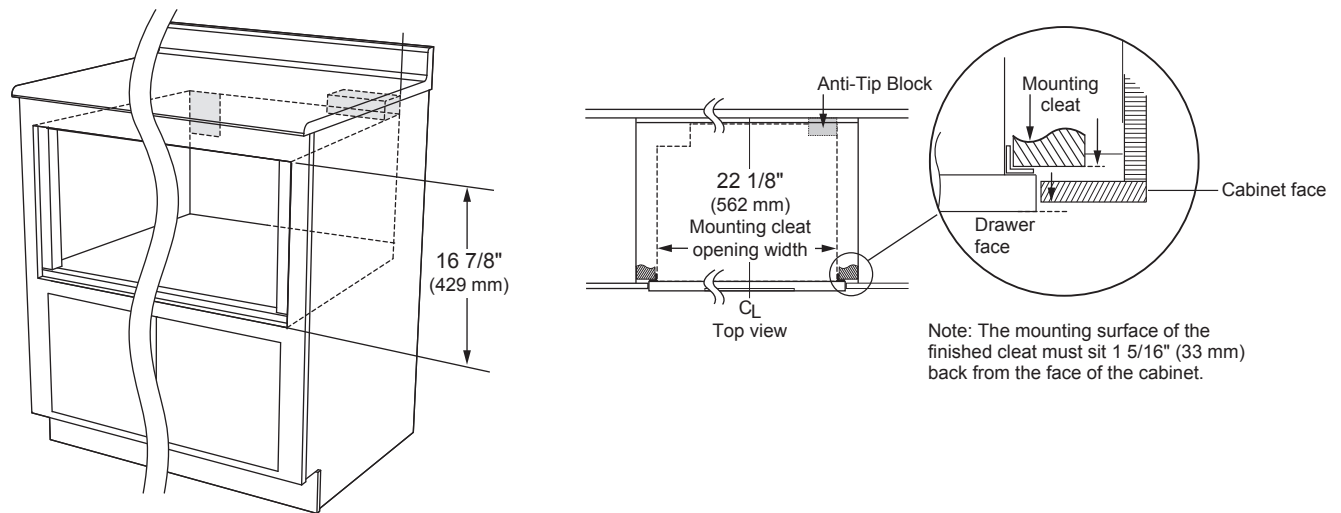

*Can also be installed using an electrical outlet in an adjacent cabinet within the area where the provided electrical cord can reach. Power cord access hole in cabinet should be a minimum 1 1/2" (38 mm) diameter hole and deburred of all sharp edges.



Notes

In the true flush application, the appliance is mounted just as described, truly flush with the cabinet face. However, due to the appliance face and the cabinet face being on the same plane, the cabinet cutout edges will be visible and exposed. It is recommended in this true flush installation to finish / stain these edges.


SKSMD2401S MICROWAVE OVEN DRAWER

SIGNATURE
KITCHEN SUITE

DEFLECTOR VENT KIT INSTALLATION – REQUIRED FOR FLUSH AND TRUE FLUSH INSTALLATION

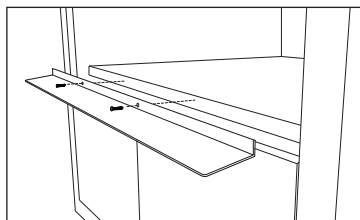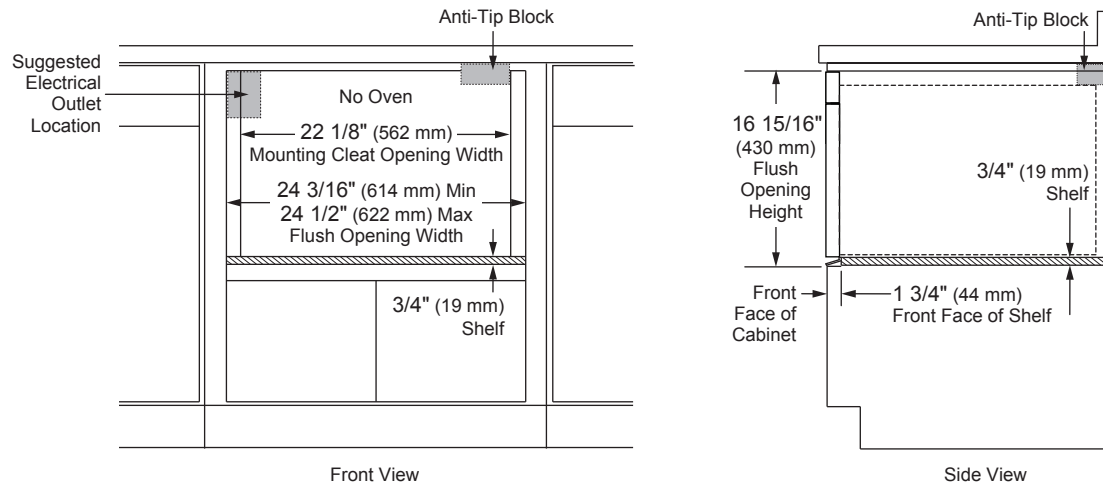

Shelf detail showing the deflector vent during installation.
Position deflector vent and mark holes.
Pre drill using a 1/16" (1.57 mm) bit before mounting.

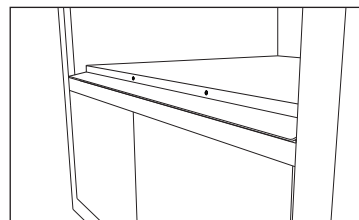

Shelf detail showing the deflector vent installed.


RH006

chimney wall hood




30" model shown


MODEL	RH00630BS RH00636BS
SIZE	30" 36"
NET WIDTH	29-15/16" 35-7/8"
MAX. CFM	600
CFM SELECTOR*	390, 290
MAX. SONES	6
FEATURES	
color	stainless steel
controls	3-speed, capacitive touch
delay off	yes, 5 minute
lighting	5W LED strip
dual level lighting	yes
filters	baffle (2)
recirculating option	yes
extension duct cover	yes
DUCT SPECIFICATIONS	
vertical	6" round
horizontal	n/a
ACCESSORIES	
recirculating kit	RHRK006BS
extension duct cover	RHEX001S (up to 12' ceiling)
AC INPUT	120v, 60hz
AC POWER	max. 320w @ 2.6a
INSTALLATION HEIGHT**	24" - 34"

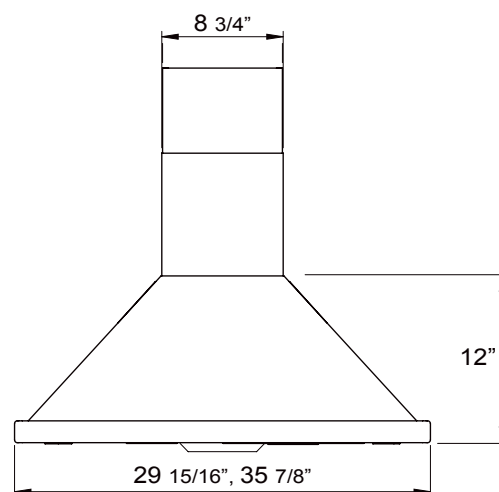

FRONT

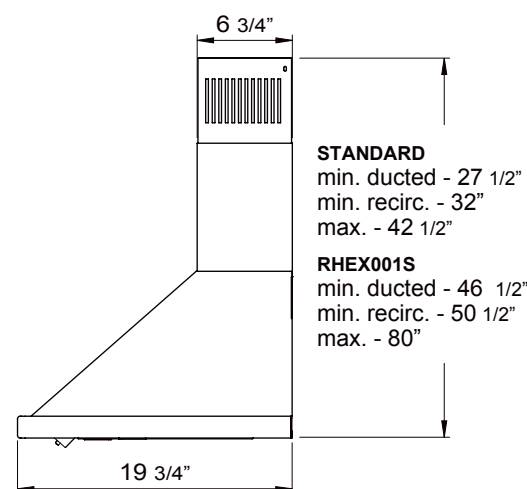

SIDE

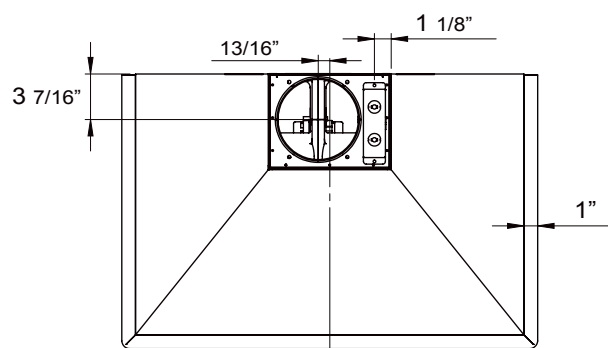

TOP

*CFM Selector enables the installer to limit the maximum CFM to meet local codes. When enabled, the fan speeds will be reduced as follows; 390 CFM = 2 speeds, 290 CFM = 1 speed.

**installation height is the distance between top of cooking surface and bottom of hood.



2018.07

vsupport@ventingservices.com | 1.888.750.1698